




Hely

Heliport Beacon



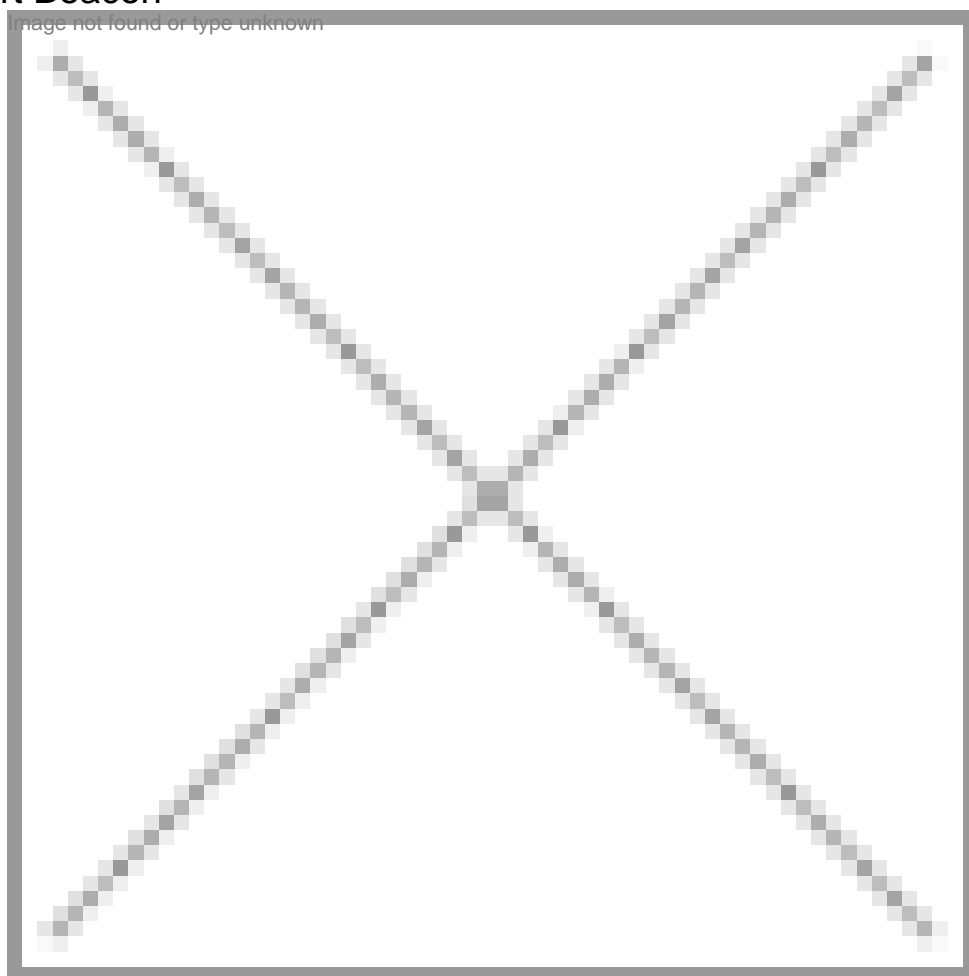

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

HELY



APPLICATION



Heliports

This product can be used successfully in various applications in different fields:

- Heliport lighting



TECHNICAL SPECIFICATIONS

| | |
|-------------------|--------------------------------------|
| Casing material | Anodized aluminum |
| Light diffuser | Clear polycarbonate |
| Casing color | Standard: AVIATION YELLOW (RAL 1004) |
| Power consumption | 1.3Wh |
| Number of LEDs | 64 |



DESCRIPTION

- Helicopter Beacon, the intermittent flashing of this body signals the letter H in the Morse Code according to ICAO Annex 14, Volume 2, in order to indicate the presence of a heliport to helicopter pilots at night.
- Designed and manufactured in Romania.
- We offer complete solutions, fast deliveries and technical support.



PHOTOMETRIC CHARACTERISTICS

- Heliport BEACON, luminous intensity > 100 cd, color of light: WHITE - according to CIE Chromaticity Boundary
- Light intensity can be programmed at 3%, 10% and 100% using a control panel according to ICAO Annex 14 V2



TECHNICAL SPECIFICATIONS

- The casing is made of powder coated aluminium.
- The diffuser is made of clear polycarbonate.
- The fitting will be bolted on any flat surface with a frangible coupling



OPERATING ENVIRONMENT

- Rated operating temperature from -40 °C up to +50 °C.
- The ingress protection rating is IP 66.
- The impact protection rating is IK 10.



ELECTRICAL CHARACTERISTICS

- Power supply 230V ac - non dimmable/ 48V dc - dimmable at 10%, 30% and 100%



DIMENSIONAL CHARACTERISTICS

D200x178mm