


Aero


APRON



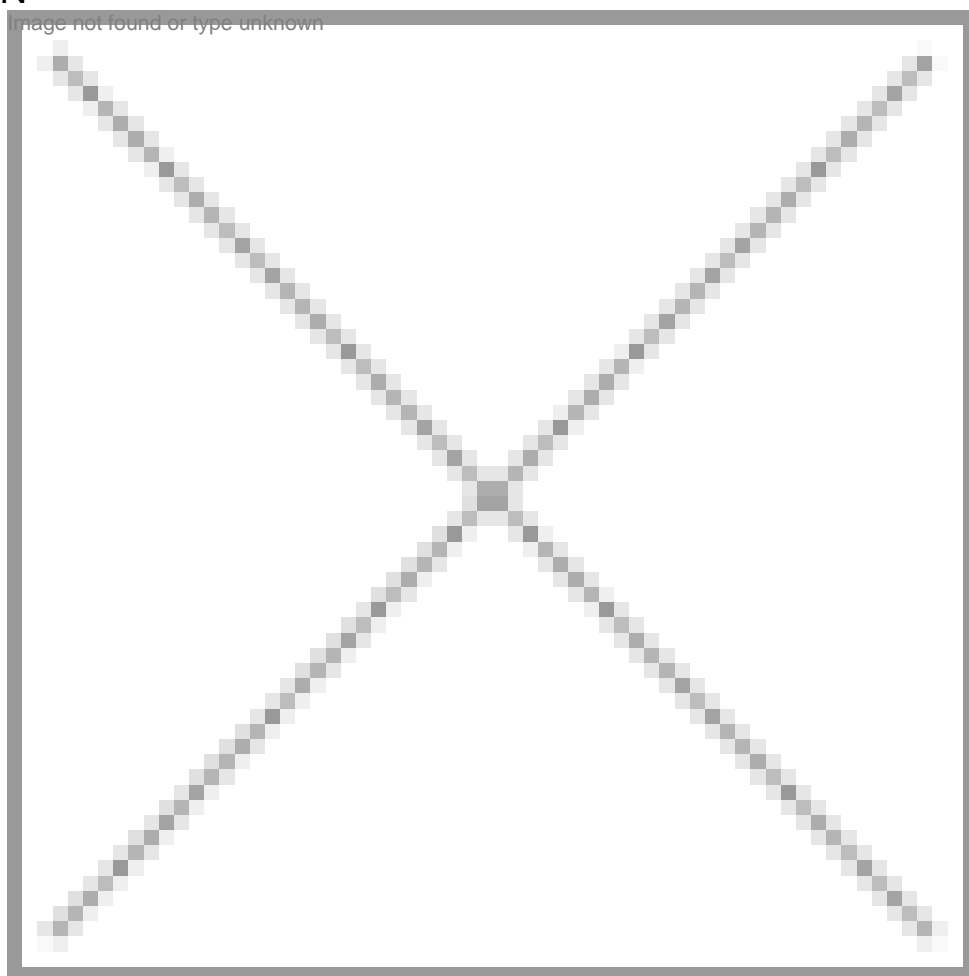

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

AERO

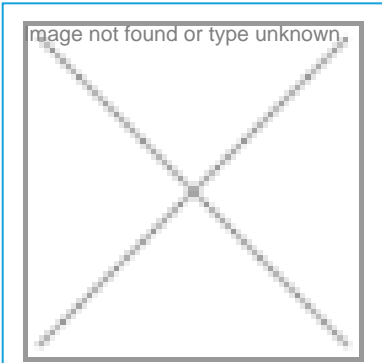

APPLICATION



Airfields

This product can be used successfully in various applications in different fields:

- Airfield lighting



TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Clear polycarbonate
Casing color	Standard: GREY Other colors available on demand
Number of LEDs	9
Total power	300-450W
Driver	Included
COD PRODUS	LI-016



DESCRIPTION

- The APRON projector is used to illuminate the platforms for boarding or stationary aircraft.
- Designed and manufactured in Romania



OPERATING ENVIRONMENT

- The impact protection rating is IK 10.
- Rated operating temperature from -40 °C up to +50 °C.
- The ingress protection rating is IP 66.



PHOTOMETRIC CHARACTERISTICS

- Luminous flux min 45000lm
- Powerful Bridgelux COB LEDs
- Color rendering index: 80 for WN and 70 for WH



ELECTRICAL CHARACTERISTICS

- Power factor >0,95
- Standard power supply 90-230V AC, 50/60Hz
- Electrical safety class I




TECHNICAL SPECIFICATIONS

- The casing is made of powder coated aluminium.
- The disperser is made from UV protected polycarbonate.



DIMENSIONAL CHARACTERISTICS

750 x 400 x 300 mm



Narrow focus (N)
