




Display Line III

Industrial linear projector



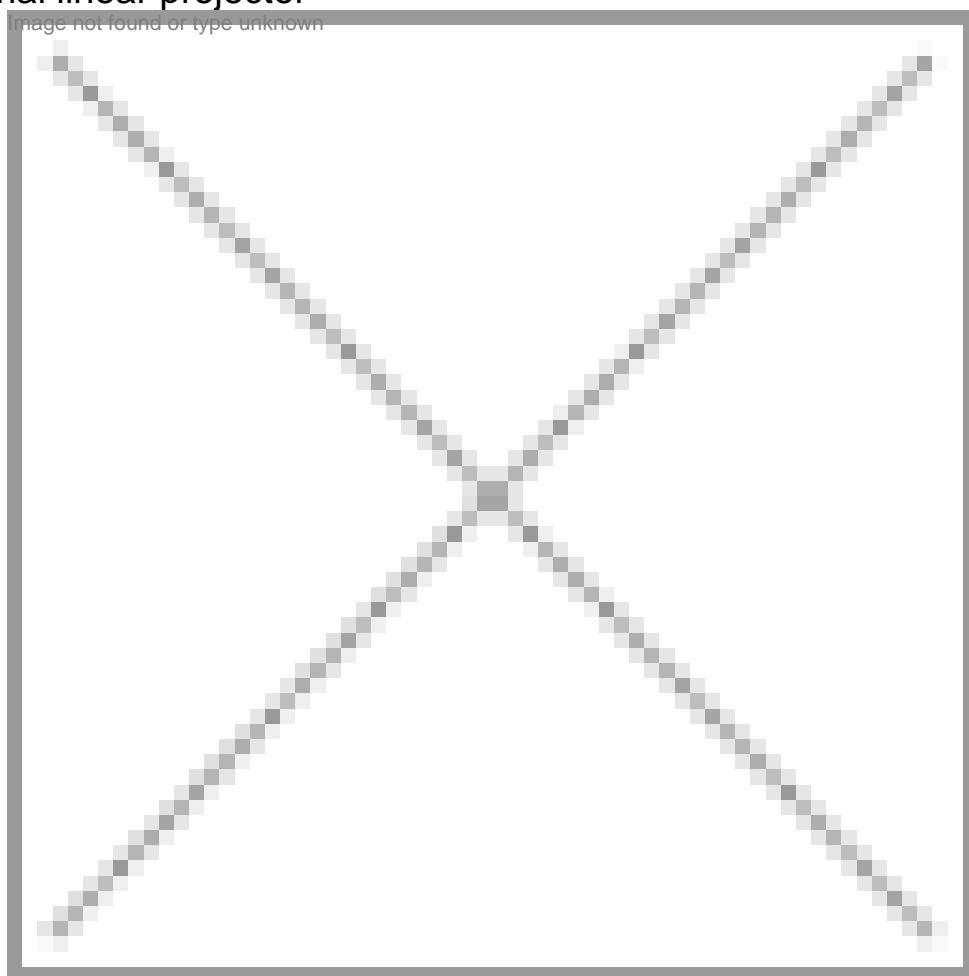

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT


DISPLAY LINE III



APPLICATION



Commercial



Industrial

This product can be used successfully in various applications in different fields:

- Showroom, showcase lighting
- Production facility lighting



TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Clear polycarbonate Multi-prismatic
Casing color	Standard: WHITE Other colors available on demand
Number of modules	2 3 5
Total power	12.5W 25W 37.5W 50W 62.5W
Driver	Included (Inside the body case)
Number of LEDs	20
COD PRODUS	LI-034



DESCRIPTION

- This LED linear projector uses the latest Samsung LEDs and gives the fixture a luminous flux of minimum 120 lm/W. We use specially designed multi prismatic or clear polycarbonate diffusers thus obtaining high quality results.
- Designed and manufactured in Romania.



TECHNICAL SPECIFICATIONS

- The casing is made of powder coated aluminium
- The diffuser is made of clear polycarbonate or multi prismatic, the last one reduces the UGR factor.
- The fixtures can be suspended or applied.
- It can have up to 6 modules in a line.



ELECTRICAL CHARACTERISTICS

- Electrical safety class I
- Standard power supply 90-230V AC, 50/60Hz

- Total power depends on the number of modules, 12.5W/module



PHOTOMETRIC CHARACTERISTICS

- It uses 20 SMD Samsung LEDs per module with a lifespan of 100.000 hours.
- Color rendering index: 80 for WN and 70 for WH





OPERATING ENVIRONMENT

- The ingress protection rating is IP 40, on demand IP 65.
- Rated operating temperature from -20 °C up to +40 °C.



DIMENSIONAL CHARACTERISTICS

- For 1 module:
- 300mm
- Weight 0,8kg



Omnidirectional focus (O)
