


PERLA




LED Park Lamp Perla



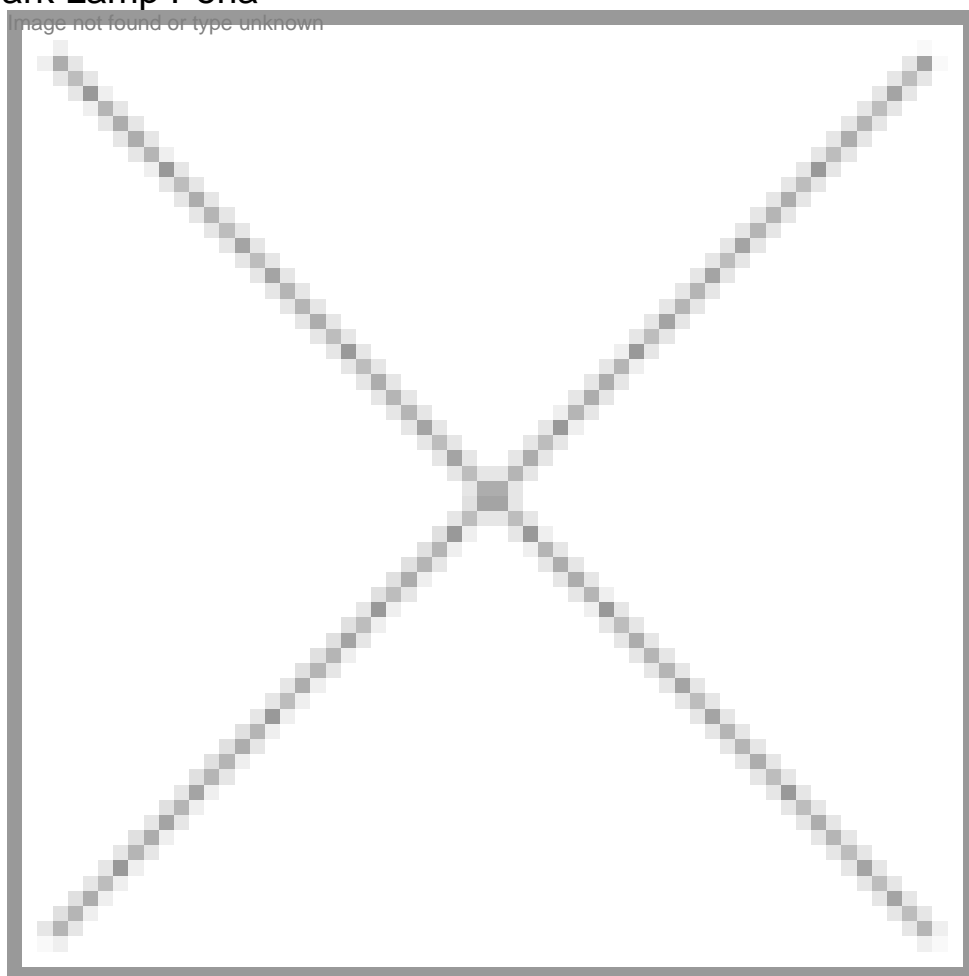

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

PERLA

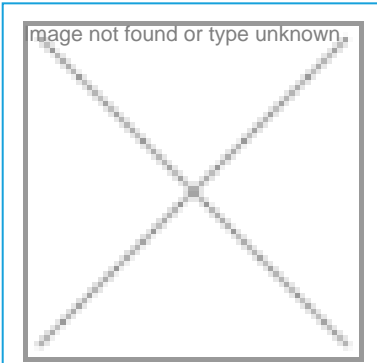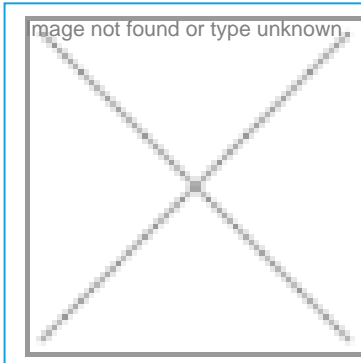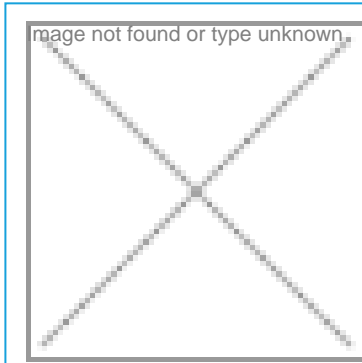


APPLICATION



Commercial



Residential



Public

This product can be used successfully in various applications in different fields:

- Garden lighting
- Parking lot lighting
- Perimeter lighting
- Street lighting
- Architectural lighting
- Pathway lighting
- Park lighting
- General lighting



TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	PMMA
Power supply	Standard: 230 V AC
Number of LEDs	8 12 1COB
COD PRODUS	LO-035
Total power	20W 30W 43W



DESCRIPTION

- Specially designed for park lighting, access ways, general lighting
- Designed and produced in Romania.



TECHNICAL SPECIFICATIONS

- Outer body is made from powder coated aluminium.
- The spherical diffuser is made of translucent PMMA.
- Mounting is done on a vertical pole.



PHOTOMETRIC CHARACTERISTICS

- Powerful Osram LED with a lifespan of 100.000 hours
- Color rendering index: 80 for WN and WW and 70 for WH



OPERATING ENVIRONMENT

- Rated operating temperature from -20 °C up to +40 °C.
- The ingress protection rating is IP 65.





DIMENSIONAL CHARACTERISTICS

- 440 mm height
- 440 mm outer diameter
- 190 or 300 mm globe diameter



ELECTRICAL CHARACTERISTICS

- Electrical safety class I
- Standard power supply 230V AC 50Hz



Omnidirectional focus (O)
