


Hely




Inset Taxiway



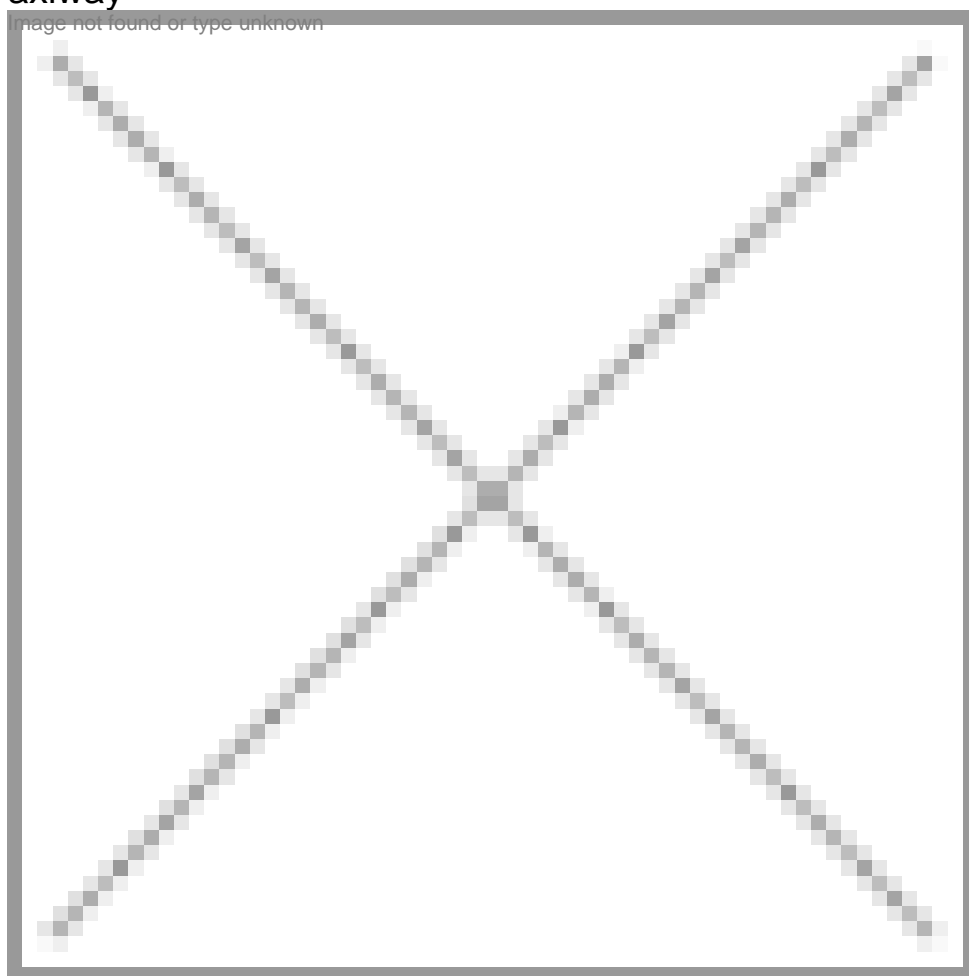

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

HELY

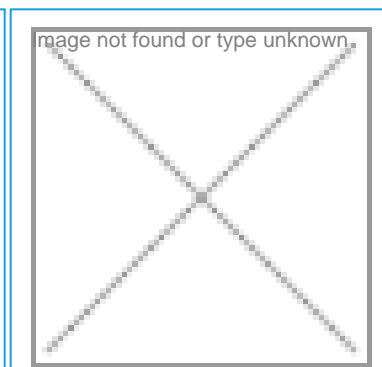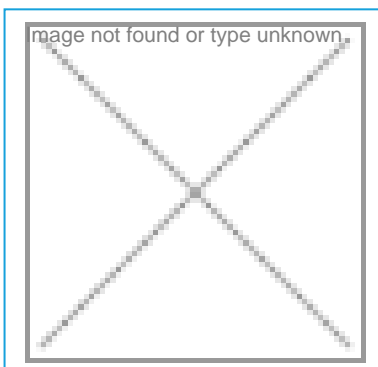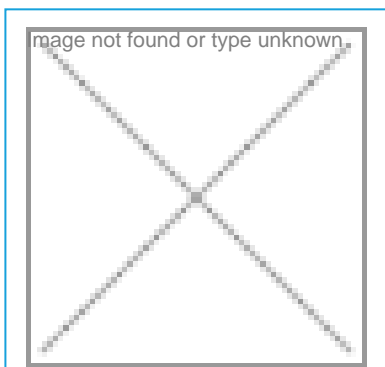

DOMENIU DE UTILIZARE



Heliporturi

Acest produs poate fi folosit cu succes in diferite aplicatii din diverse domenii:

- Iluminat heliporturi

SPECIFICATII TEHNICE

Material carcasa	Aluminium
Dispersor	Glass
Putere totala	6W
Alimentare	Heliport controller or 230 V AC
Grad de protectie	X8
COD PRODUS	AL-072-03-BL

DESCRIERE

- This is an Aiming lights or FATO lights (Final Approach and Take Off Area)
- Designed and built with simplicity and ease of maintenance in mind.
- High power LED technology
- Lightweight, low-energy and environment friendly lighting fitting.
- Extensive use of aluminium alloys reduces fitting weight and eases handling in the field.

SPECIFICATII TEHNICE

- Housing powder-coated aluminium, RAL 1004 (aviation yellow)
- Disperser is made from hardened glass
- Disperser flange is nickel-plated
- Cable gland is from brass nickel-plated
- Fasteners are made from stainless steel
- Light fixtures are provided with anti condensation valve

CARACTERISTICI FOTOMETRICE

- The lights are made according:
- ICAO: Annex 14, Volume I - Aerodrome Design and Operations
- ICAO: Annex 14, Volume II - Heliports
- IEC TS 61827: Electrical installations for lighting and beaconing of aerodromes.
Characteristics of inset and elevated luminaires used on aerodromes and heliports



MEDIU DE FUNCTIONARE

- Temperature range -55 to +55 Celsius degree
- Degree of protection IP X8
- Ka tested: Salt mist in accordance with IEC 60068-2-11 and IEC 60068-2-25
- Light fixtures are UV protected



CARACTERISTICI ELECTRICE

- Power consumption: 6W
- Power supply can be made in two versions:
- 48V DC from controller - dimmable : 100% ,30%, 10%
- 90-230V, 50/60Hz - non dimmable



CARACTERISTICI DIMENSIONALE

- Diameter: 153 mm
- Height: 80 mm
- Weight: 1.5 kg