


Protect




Safety Lighting LS-07, emergency kit included



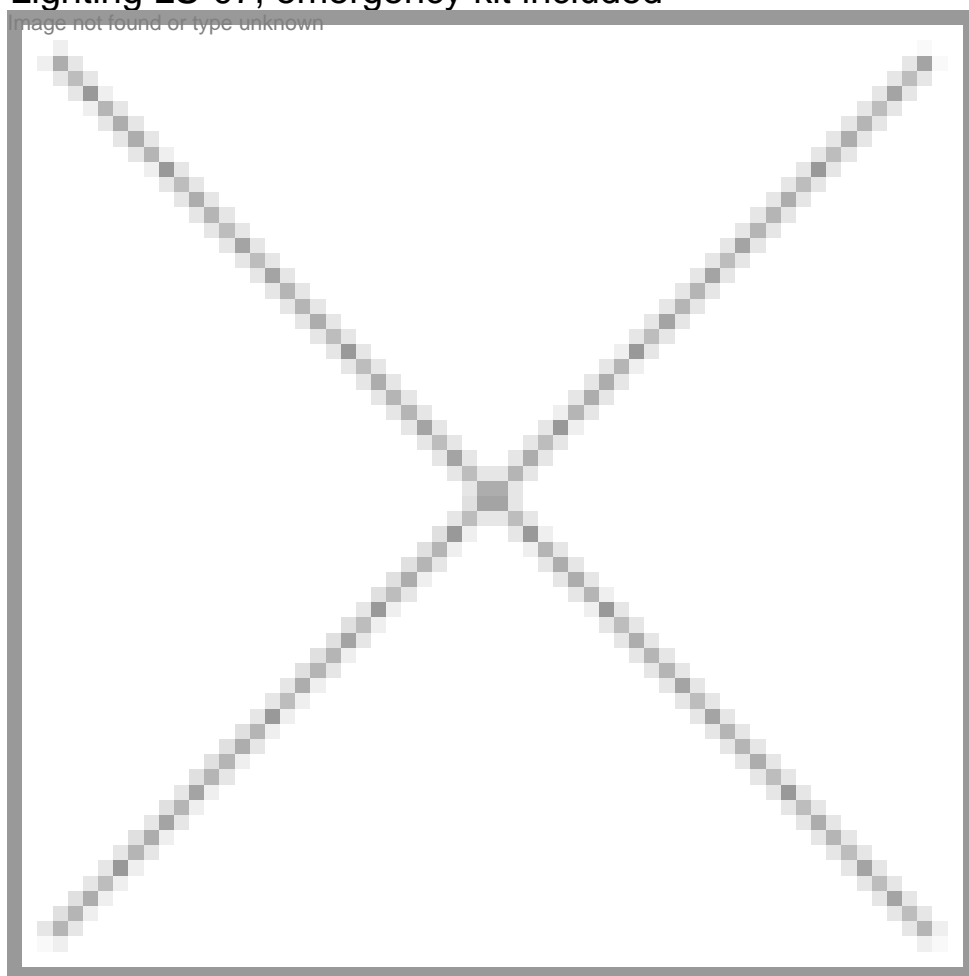


ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

PROTECT

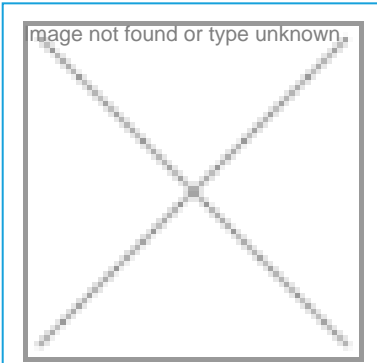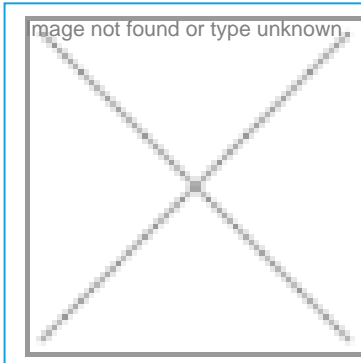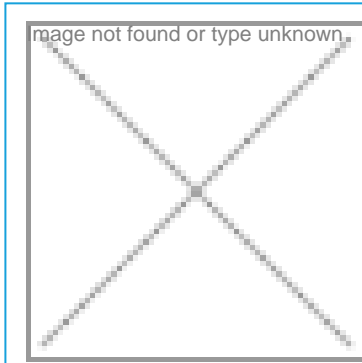

APPLICATION



Offices



Schools



Hospitals

This product can be used successfully in various applications in different fields:

- Safety lighting



TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Clear polycarbonate
Casing color	Standard: GREY
Autonomy	1h 3h
Number of LEDs	4
COD PRODUS	LS-007
Total power	2W



DESCRIPTION

- It works when connected to the electrical network, in case of network voltage shortage the power supply will be done through the batteries.
- The lettering of the diffuser may be different depending on customer requirements.
- Designed and manufactured in Romania



TECHNICAL SPECIFICATIONS

- Casing is made of powder coated aluminium.
- It can be mounted on any flat surface vertical or horizontal
- The diffuser is made of 3 mm thick UV protected clear polycarbonate.
- On the front you can find a LED used for signaling the charging process also a button for testing if the product works when using the batteries



ELECTRICAL CHARACTERISTICS

- Standard power supply 230V AC
-

Minimum autonomy of 1 hours from the outage, optional 3 hours

- NiMH batteries
- Electrical safety class III



PHOTOMETRIC CHARACTERISTICS

- The product uses 4 high power Osram LEDs.
- The colour used is cool white(5000K).
- Observation distance up to 25 m





OPERATING ENVIRONMENT

- The ingress protection rating is IP 65.
- Rated operating temperature from -20 °C up to +40 °C.



DIMENSIONAL CHARACTERISTICS

- 315 x 133 x75
- Weight 1,2kg

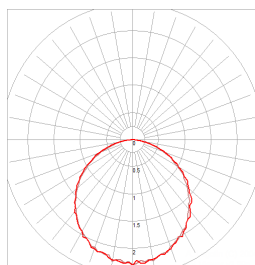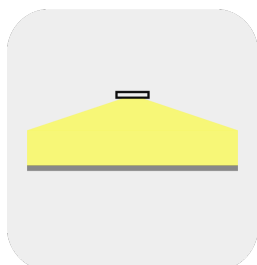

Omnidirectional focus (O)
