





Hely



Heliport Approach Steady

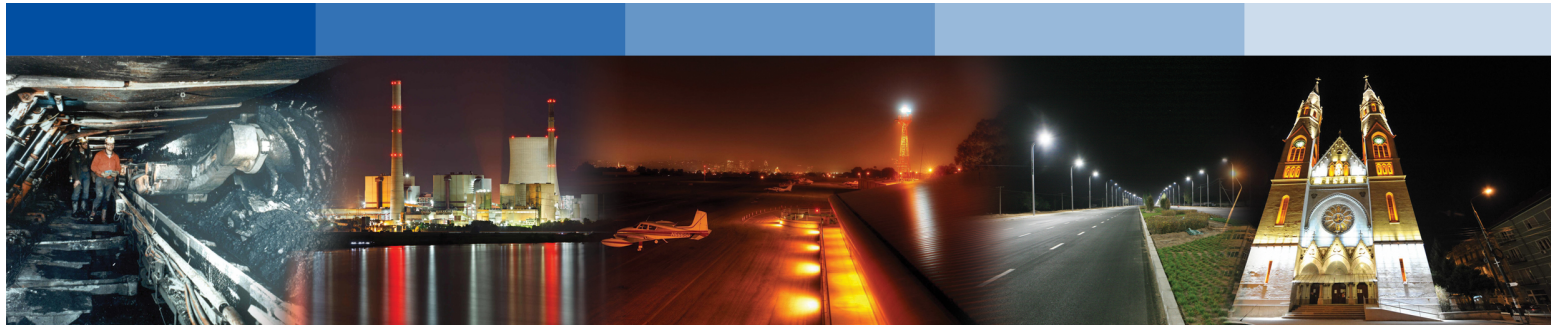

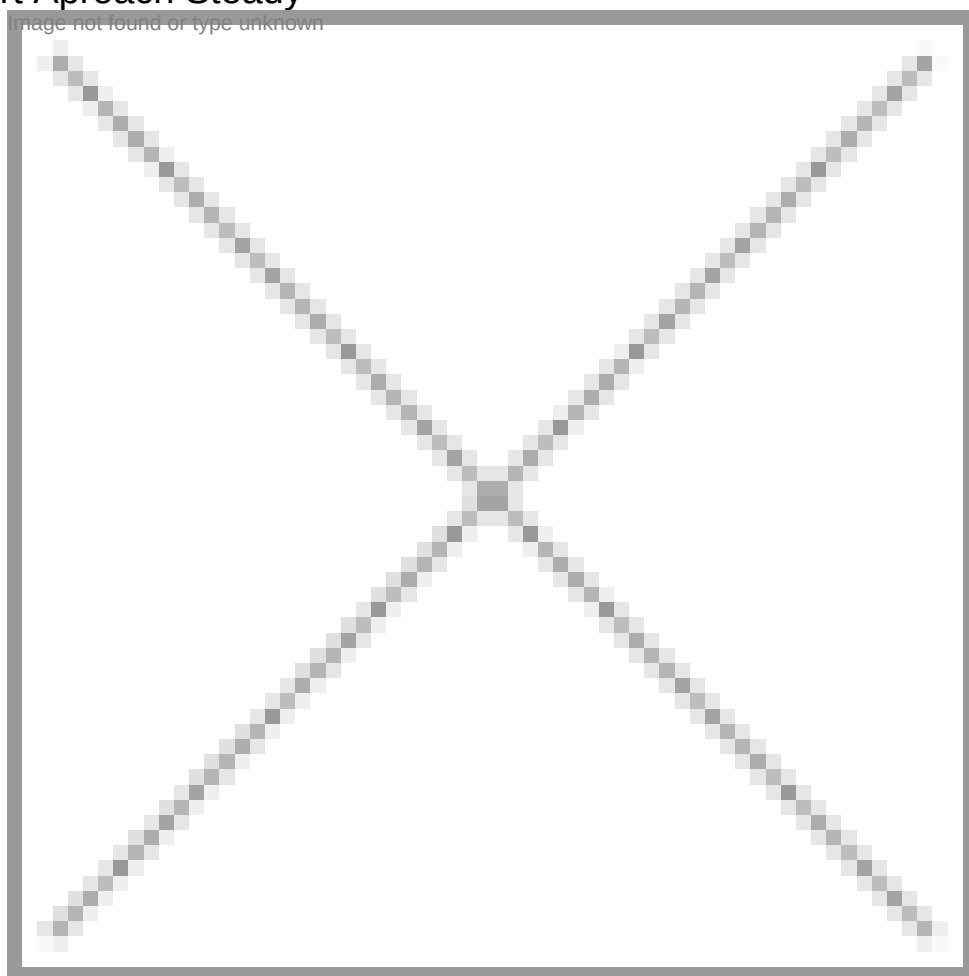

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

HELY

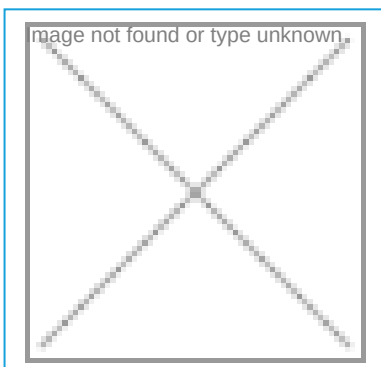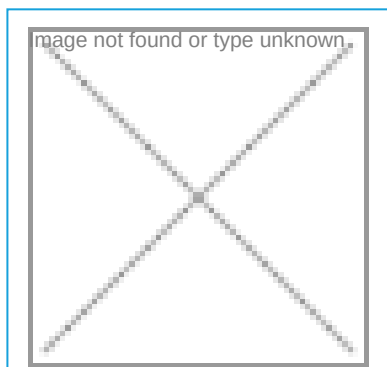

DOMENIU DE UTILIZARE



Heliporturi

Acest produs poate fi folosit cu succes in diferite aplicatii din diverse domenii:

- Iluminat heliporturi



SPECIFICATII TEHNICE

Material carcasa	Aluminiu vopsit in camp electrostatic
Dispersor	Polycarbonat transparent
Culoare carcasa	Standard: GALBEN AVIATIE (RAL 1004)
Putere totala	20W
Sursa	DCR
Numar LEDuri	8



DESCRIERE

- Heliport Approach Steady sunt folosite in sistemele de apropiere vizuala.
- Proiectat si fabricat in Romania.



CARACTERISTICI FOTOMETRICE

- Heliport APROACH STEADY, intensitate luminoasa > 350 cd, culoarea luminii: ALB - conform CIE Chromaticity Boundary
- Intesitatea luminoasa se poate programa la 10%, 30% si 100% cu ajutorul unui panou de control conform conform ICAO Anexa 14 V2



CARACTERISTICI ELECTRICE

- Alimentarea se face din tabloul de comanda, tabloul care suporta functia de dimare a balizelor, optional alimentarea se face de la tensiunea de retea 90-230V, 50/60Hz caz in care balizele nu mai au functia de dimare.



MEDIU DE FUNCTIONARE

- Gradul de protectie la impact este IK10.

- Temperatura de functionare nominala de la -40 pana la +50 °C.
- Gradul de protectie la apa si praf este IP66.



SPECIFICATII TEHNICE

- Carcasa este realizata din aluminiu vopsit in camp electrostatic
- Dispersorul este realizat din policarbonat transparent rezistent UV



CARACTERISTICI DIMENSIONALE

D90 x 155 mm