




## Saturn



6 LED Adjustable Projector



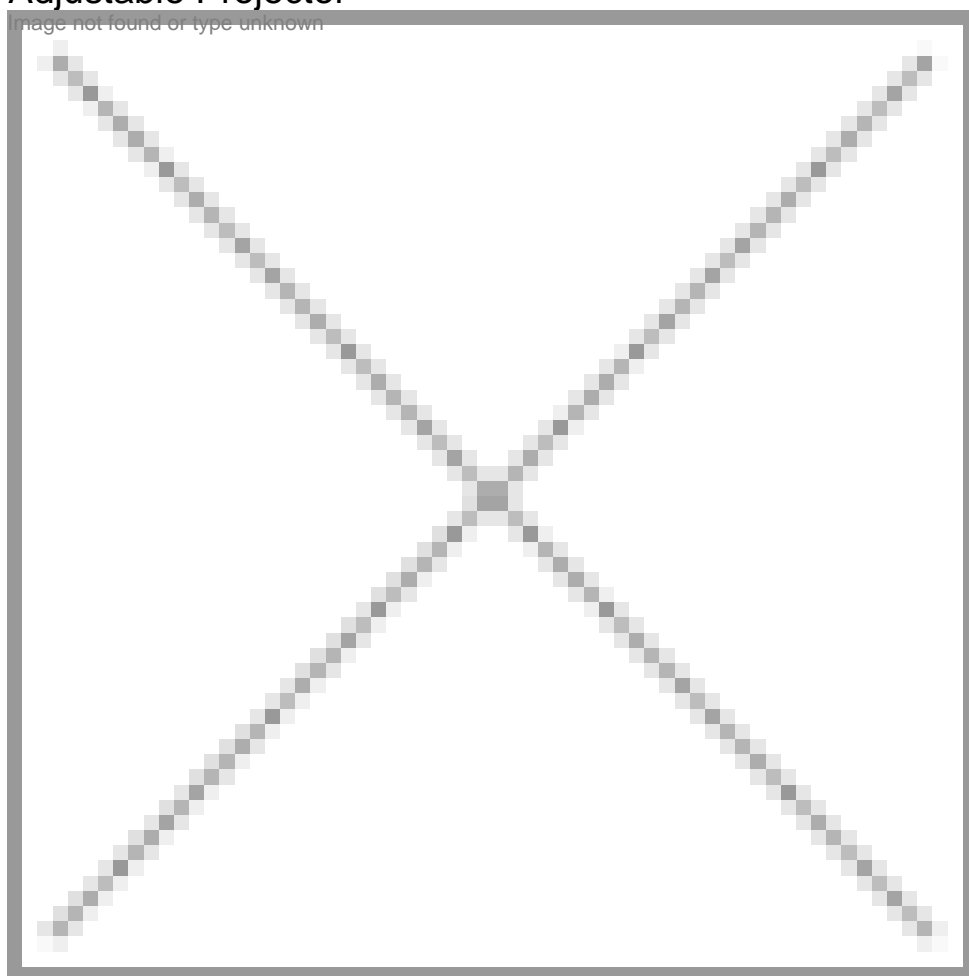

**ElectroMax**<sup>®</sup>  
WE ARE JUST MAKING LIGHTING RIGHT

SATURN

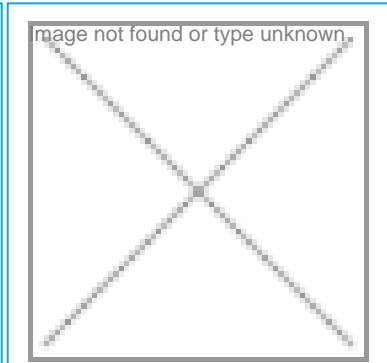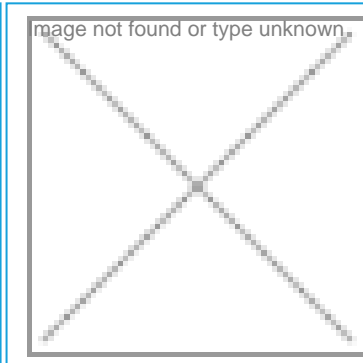

APPLICATION



Commercial



Residential



Public



Architectural

This product can be used successfully in various applications in different fields:

- Garden lighting
- Mood lighting



## TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Sticla (8 mm)
Casing color	Standard: BLACK
Power supply	12-24V DC 230V AC
Number of LEDs	6
Power / LED	1W 2.5W
Total power	6W 15W
Driver	Included (Inside the body case)
COD PRODUS	LO-013



## DESCRIPTION

- Designed and manufactured in Romania.
- This LED ornamental projector is small in size. The projector, with a modern design, can be mounted on the facades for a special architectural lighting, also it can highlight a desired object.



## ELECTRICAL CHARACTERISTICS

- The power consumption of the network is 6 or 15W depending on the power consumed by the LEDs. One of these options can be chosen.
- Electrical insulation class III
- Power cable length 2m
- Standard power supply 12-24V DC, optionally 230V AC



## TECHNICAL SPECIFICATIONS

- The casing is made of powder coated aluminium.

- Projector flanges are made of stainless steel.
- The diffuser is made of 8mm thick secure glass.



## PHOTOMETRIC CHARACTERISTICS

- Color rendering index: 80 for WN and WW and 70 for WH
- Luminous efficiency of white LEDs: min. 250 lm / LED for WH and min. 200 lm / LED for WW




## OPERATING ENVIRONMENT

- Nominal operating temperature from -20 to +40 °C
- The IP rating of the optical compartment and the power driver is IP67




## DIMENSIONAL CHARACTERISTICS


- 130 x 84 mm
- Weight 1,1kg




**Narrow focus ( N )**



**Medium focus ( M )**



**Wide focus ( W )**



**Street focus ( S )**