




Atlas



24 LED Recessed Projector



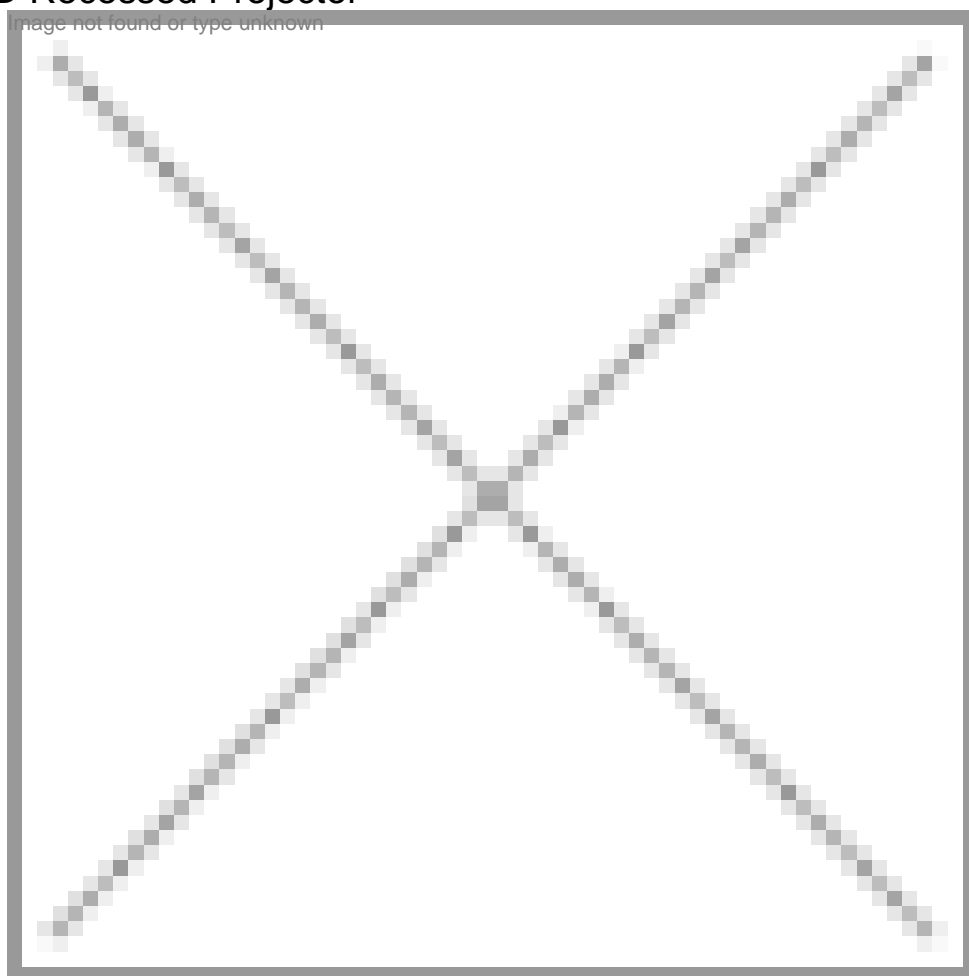

ElectroMax[®]
WE ARE JUST MAKING LIGHTING RIGHT

ATLAS

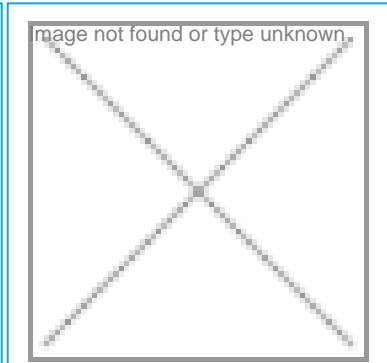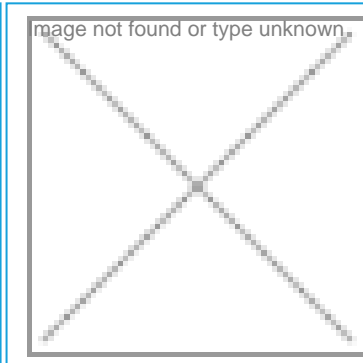

APPLICATION



Commercial



Residential



Public



Architectural

This product can be used successfully in various applications in different fields:

- Garden lighting
- Mood lighting
- Recessed lighting



TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum (Capacul realizat din INOX)
Light diffuser	Sticla securizata (8 mm)
Power supply	12-24V DC 240V AC
Number of LEDs	24
Driver	Included (Inside the body case)
COD PRODUS	LO-016
Power / LED	1W
Total power	24W



DESCRIPTION

- The reflector has a very robust build, resistant to pedestrian and heavy vehicular traffic.
- This ornamental LED projector has a small size and due to LED very long lifespan, it is virtually maintenance-free.
- Designed and manufactured in Romania
- With a modern design, the projector can be embedded in any horizontal or vertical flat surface.



TECHNICAL SPECIFICATIONS

- The diffuser is made of 8mm thick secure glass.
- Projector flanges are made of stainless steel.
- The casing is made of powder coated aluminium.



ELECTRICAL CHARACTERISTICS

- Standard power supply 12-24V DC, optionally 230V AC

- Power cable length 2m
- Electrical insulation class III



PHOTOMETRIC CHARACTERISTICS

- Color rendering index: 80 for WN and WW and 70 for WH
- Luminous efficiency of white LEDs: min. 250 lm / LED for WH and min. 200 lm / LED for WW




OPERATING ENVIRONMENT

- Nominal operating temperature from -20 to +40 °C
- The IP rating of the optical compartment and the power driver is IP67




DIMENSIONAL CHARACTERISTICS


- 245 x 40 mm
- Weight 2,5kg




Narrow focus (N)



Medium focus (M)



Wide focus (W)



Street focus (S)