




## Protect

Safety Lighting LS-05



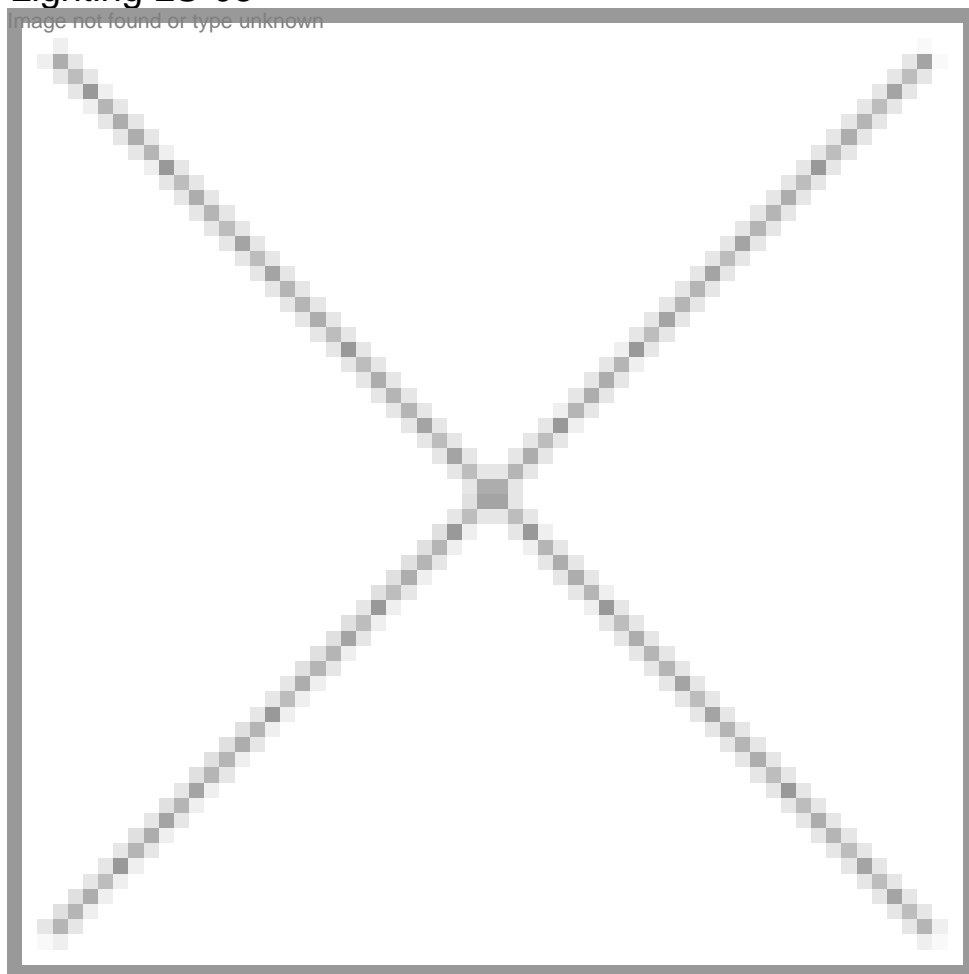


**ElectroMax**<sup>®</sup>  
WE ARE JUST MAKING LIGHTING RIGHT

PROTECT



APPLICATION



Offices



Schools



Hospitals

This product can be used successfully in various applications in different fields:

- Safety lighting



## TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Clear polycarbonate
Power supply	Standard: 230 V AC
Casing color	Standard: WHITE
Total power	2W



## DESCRIPTION

- The fixture works on the principle of optical fiber. LED light is led through two plastic plates. The result is a body with a very clear ideogram, visible from a bigger distance.
- Designed and manufactured in Romania.



## TECHNICAL SPECIFICATIONS

- It can be mounted on any flat surface vertical or horizontal
- The lettering of the lens can be different depending on customer requirements.
- The product is equipped with a test button and a charging status LED.
- Powder coated aluminium casing.
- The diffuser is made of 3 mm thick UV protected clear polycarbonate.



## ELECTRICAL CHARACTERISTICS

- Standard power supply 230V AC
- Minimum autonomy of 3 hours from the outage
- NiMH batteries
- Electrical safety class III



## OPERATING ENVIRONMENT

- The ingress protection rating is IP 40.
- Rated operating temperature from 0 °C up to +40 °C.



## PHOTOMETRIC CHARACTERISTICS

- The product uses 20 Samsung LEDs.
- The colour used is cool white(5000K).



## DIMENSIONAL CHARACTERISTICS

355 x 40 x 145 mm