




# Atlas

## 5 LED Recessed Projector



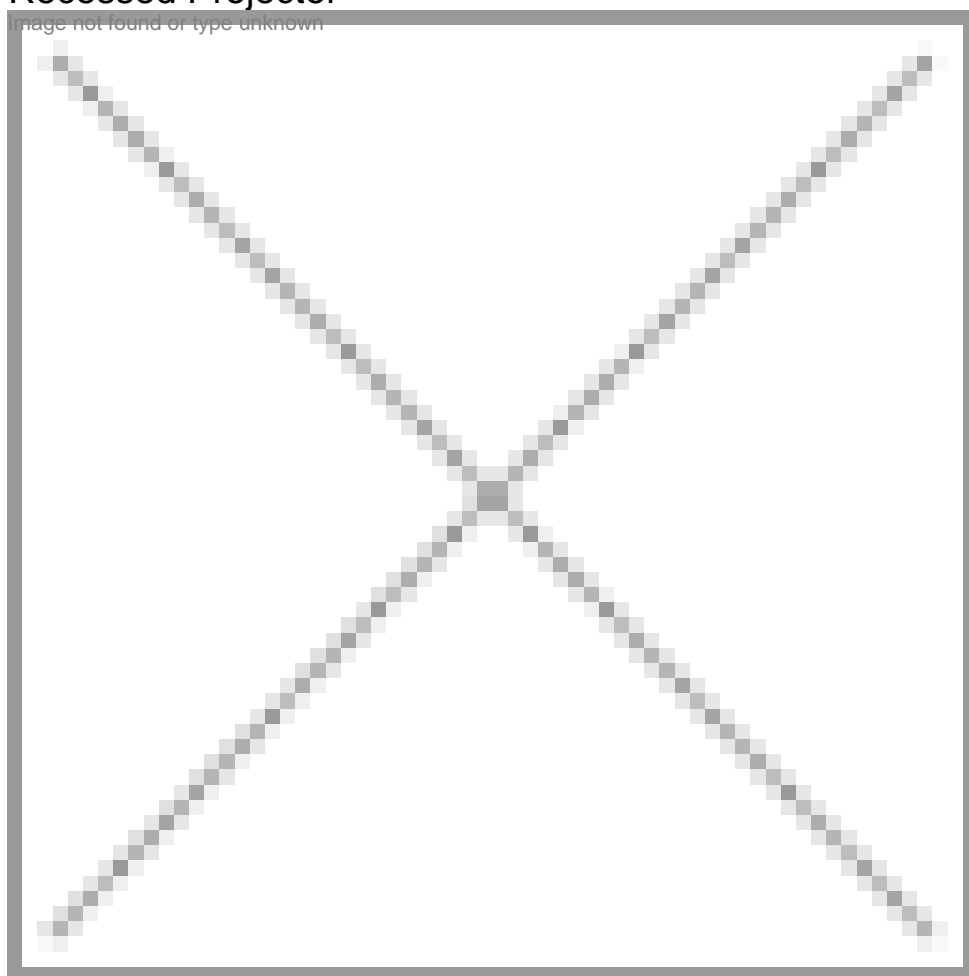

**ElectroMax**<sup>®</sup>  
WE ARE JUST MAKING LIGHTING RIGHT

ATLAS



APPLICATION



Commercial



Residential



Public



Architectural

This product can be used successfully in various applications in different fields:

- Garden lighting
- Recessed lighting



## TECHNICAL SPECIFICATIONS

Casing material	Anodized aluminum
Light diffuser	Sticla (8 mm)
Casing color	Standard: BLACK
Power supply	12-24V DC 230V AC
Number of LEDs	5
Power / LED	1W 2.5W
Total power	5W 15W
Driver	Included (Inside the body case)
COD PRODUS	LO-016



## DESCRIPTION

- This ornamental LED projector has a small size and due to LED very long lifespan, it is virtually maintenance-free.
- Designed and manufactured in Romania.
- With a modern design, the projector can be embedded in any horizontal or vertical flat surface.
- The reflector has a very robust build, resistant to pedestrian and heavy vehicular traffic.



## ELECTRICAL CHARACTERISTICS

- Electrical insulation class III
- Power cable length 2m
- The power consumption of the network is 5 or 12.5 watts depending on the power consumed by the LEDs. One of these options can be chosen
- Standard power supply 12-24V DC, optionally 230V AC



## TECHNICAL SPECIFICATIONS

- Projector flanges are made of stainless steel.
- The casing is made of powder coated aluminium.
- The diffuser is made of 8mm thick secure glass.



## PHOTOMETRIC CHARACTERISTICS

- Luminous efficiency of white LEDs: min. 250 lm / LED for WH and min. 200 lm / LED for WW
- Color rendering index: 80 for WN and WW and 70 for WH




## OPERATING ENVIRONMENT

- The IP rating of the optical compartment and the power driver is IP67
- Nominal operating temperature from -20 to +40 °C




## DIMENSIONAL CHARACTERISTICS


- 130 x 60 mm
- Weight 0,8kg

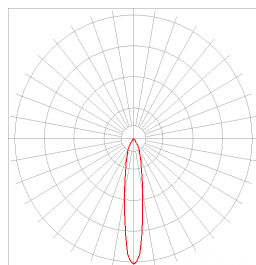


**Narrow focus ( N )**

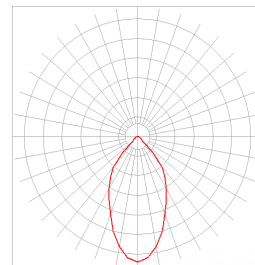

**Medium focus ( M )**

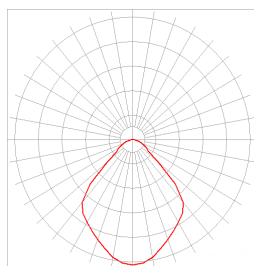

**Wide focus ( W )**

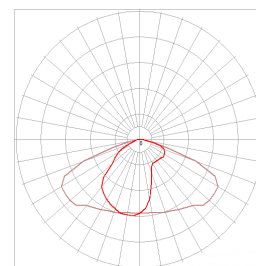

**Street focus ( S )**